


# **SOMATOM Perspective**

**Basic Planning Information** 



| Table of contents       |    |  |  |  |
|-------------------------|----|--|--|--|
| Planning Example        | 3  |  |  |  |
| Room Dimensioning       | 5  |  |  |  |
| Statics and Transport   | 6  |  |  |  |
| Air-conditioning        | 8  |  |  |  |
| Electrical Installation | 9  |  |  |  |
| General Information     | 10 |  |  |  |



#### Dimensioning

All installation measurements apply to finished wall/floor/ceiling and are to be checked prior to assembling the unit.




• Orientation point = reference point of the Siemens Healthineers unit for planning and installation

Please note: The drawing parts in this document are not to scale!



# Planning Example

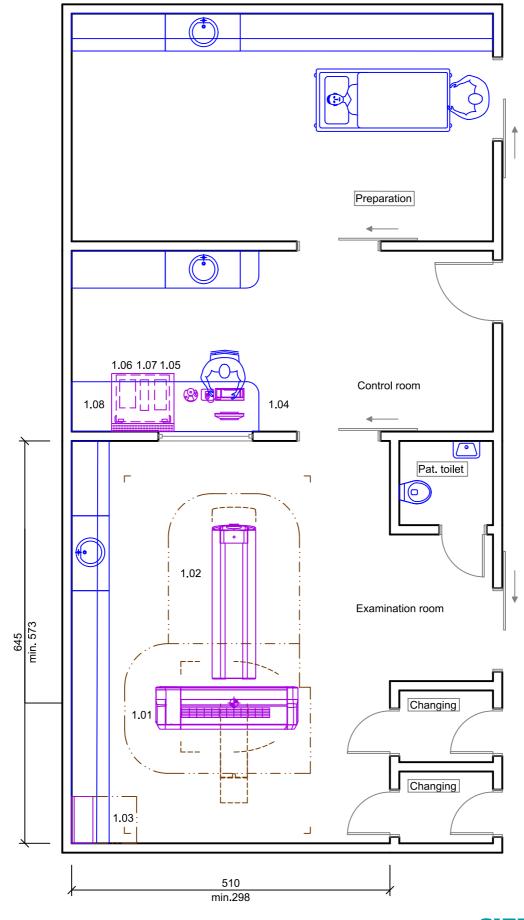



| SOMATOM Perspective - Equipment Legend |   |  |      |                  |  |  |
|--|---|--|------|------------------|--|--|
|  |   | Weight (kg), Heat dissipation to the air (W) |      |                  |  |  |
| Pos.                                   | Description   | kg   | W    | Remark           |  |  |
| 1.01                                   | Gantry  | 1345   | 6600 | #1, 16/32 slices |  |  |
| 1.02                                   | Patient table PHS 1A (max. scannable range 1600 mm)                                     | 431  |      |                  |  |  |
| 1.03                                   | Line Connection Box LCB   | 48   |      |                  |  |  |
| 1.04                                   | Control unit with monitor, control box, keyboard  | 10   | 100  |                  |  |  |
| 1.05                                   | ICS Tower 12 PC (syngo Acquisition Workplace)   | <25  |      | #3               |  |  |
| 1.06                                   | IRS G2  | <25  |      | #3               |  |  |
| 1.07                                   | UPS   | 30   |      | #3               |  |  |
| 1.08                                   | Container table with container for Tower PC   | 73   |      | optional         |  |  |
|  | #1 2500 W in stand-by mode, Isocenter at 916 mm<br>#3 <1500 W IRS, ICS, monitor and UPS |  |      |                  |  |  |



# **Room Dimensioning**

# Room dimensioning

The indicated room dimensions have to be checked on site. The planning department has to be informed about possible deviations. Otherwise we cannot assume any guarantee for the accurate implementation of the dimensions indicated in the planning documents.


#### Room height

Technically required minimum room height 2300 mm Measured from the highest point of the finished floor (with covering) to the lowest point of the ceiling



#### Statics and Transport

Statics 1:50



The floor construction has to be performed solid and free of vibration, e.g. concrete flooring C20/25 to C50/60 corresponding to DIN EN 206-1 and DIN 1045-1, according to the maximum values as specified in the textblock "Floor and building vibrations".

It is recommended to test the weight capacity of the concrete or composite flooring by a stress analyst.

The gantry needs to be bolted to the floor only if mandated by local ordinances; for example in areas prone to earthquakes.

Securing the patient table to the floor is mandatory.

The static floor load on the measuring points A to D is each 6440 N (weight of the gantry).

The amplitude for the dynamic floor load (gantry-rotation) is 250 N. The bearing surface is each 13 cm<sup>2</sup>.

#### Floor- and building vibrations

Floor- and building vibrations can reduce image quality!

Sources that produce vibrations are, e.g.:


Railroad routes, subways, roads, road works and construction sites, hospital power plants, mines, open-cast minings, quarries (explosions), ferry moorings, any other sources of striking vibrations. Any transient vibration has to be less than 0.5 m/s² peak-to-peak in the time domain.

away from vibrational sources, or the CT is replacing a CT system that to date has not shown image quality problems due to vibrations, it is usually not necessary to execute vibrational measurements.


The CT system is not sensitive to common vibrations. If the CT is

It is the customer's responsibility to contract a qualified specialist.

The specialist must implement site modifications to meet the specific limits, and to design structural solutions in case of deviations.



In the three spatial directions, acceleration in vibrations at the mounting points of the computer tomograph (Gantry and Patient Handling System PHS) must not exceed the thresholds as described in the above shown diagram.





**TIPPING HAZARD** 

# Standard transport transport rollers swiveled out Transport through narrow passages transport rollers swiveled in Transport device set to minimum floor clearance (7 mm)

make it impossible to transport the system with the rollers swivelled out.

As soon as the system has passed through narrow passages, the transport rollers have to be swivelled out again.


Transport with the rollers swivelled in is permissible only when narrow passages

Gantry with transport device: 1345 kg, Transport device: 125 kg If there is false floor in transportation route please check bearing capacity of this floor on-site!

The door must have a final clearance of 1250 mm if bed entrance to the CT examination room is requested.



## Air-conditioning

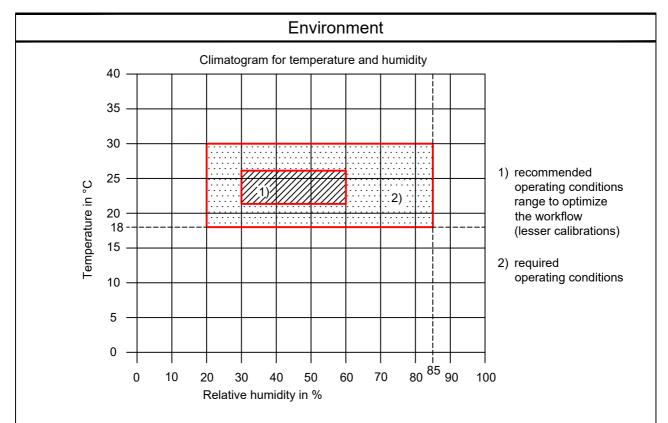

The climatograms shows the permissible temperature ranges.

The temperature gradient may not exceed 6 K / h.

If it is not possible to maintain these temperature ranges due to changes in the climate, we recommend the installation of a heating and air-conditioning system as well as the use of a dehumdifier/humidifier unit.

The optimal room temperature for operator/patient and system is 24  $^{\circ}$ C with a relative humidity of 30 to 60 % .

It is recommended that the customer installs air filters of the category EU3 to EU4 (DIN 24185/part 2) to filter out dust particles >10 µm suspended in the incoming air.



#### **Electrical Installation**

| Power requirements for SOMATOM Perspective |                           |                                    |           |  |  |  |  |
|--|---------------------------|------------------------------------|-----------|--|--|--|--|
| Power Line 3/N/PE AC 50/60 Hz ±            |                           | Connection value                   | 43.6 kVA  |  |  |  |  |
| Line Voltage                               | 400 V ± 10 %              | Power consumption - overall system |           |  |  |  |  |
| Loop impedance with 80 A fuse              | 209 mΩ                    | 16/32 slices<br>Stand-by           | ≤ 4.2 kVA |  |  |  |  |
| Line Impedance                             | 220 mΩ                    | for time up to 4 s                 | ≤ 70 kVA  |  |  |  |  |
| Cable cross section is to be determin      | 64/128 slices<br>Stand-by | ≤ 5.2 kVA                          |           |  |  |  |  |
| Max. size of connector terminals LCB       | for time up to 4 s        | ≤ 70 kVA                           |           |  |  |  |  |

# Room lighting

Ambient lighting in rooms with diagnostics or with workstations must comply with the respective local and national regulations.

General requirements like the needed intensity of illumination - adjustable, reproducible, flicker-free or a limitation of dazzlings and reflections etc. have to be observed (EN 12464-1, DIN 5035-7).



#### **General Information**

#### Display screen workstations

For setting up display screen workstations, take account of the guidelines in the Display Screen Workstation directive as well as any national regulations (e.g. EN ISO 9241-5).

#### Smart Remote Services (SRS)

Smart Remote Services (SRS) is used for remote diagnostics as well as remote service to provide highest system availability.

#### Requirements:

- Broadband connection (minimum 4 MBit/s down- and 768 kBit/s upstream, optimum 30 MBit/s down- and 2 MBit/s upstream) without time or volume limitations
- Router (for exclusive use with SRS)

Data protection and security is defined in the Smart Remote Services security concept.

#### **Network Integration**

The Siemens Healthineers components are using TCP/IP Protocol, a 100/1000 Mbit/s switched Ethernet network and static IP addresses.

The required network cabling (min. CAT 5 TP) has to be provided on site. Media converters, which are needed for using fibre optic cabling, are not in scope of delivery.

To prepare the implementation of the new system into the existing network environment, the availability of the needed network data at least two weeks before starting the installation is mandatory.

This is the only way to ensure a seamless integration of the new system into the workflow of the department.

#### Notes on preparations for installation

Contracts for performing and supervising on-site installation preparations should be concluded with technically competent companies by the customer. The customer is responsible for timely and proper completion and supervision of all preparations for installation at the construction site in observance of all applicable legal regulations (e.g. X-ray regulations, radiation protection regulations) and all applicable general recognized rules of technology (e.g. VDE regulations, DIN standards).

Execution and supervision of installation preparations at the construction site and later observance of the standard operating conditions are not included in our duties. The customer is responsible for checking the static calculations and, where applicable, the air conditioning in the building to be equipped.

### Safety distances

Distances from moving parts of the medical device to walls, furniture and other equipment have to be kept to avoid injuries by crushing in compliance with local regulations, e.g. a minimum distance of 50 cm according to DIN EN ISO 13854.

It is the customer's responsibility to ensure the above requirements are followed. This is to avoid the risk of injury.

If safety distances are not maintained appropriate on-site safety measures have to be put in place. Clear visible markings according to national guidelines, e.g. crushing warning signs, hazard warning tape, hazard area cordon, safety mats, may be required.



#### Radiation protection

The structural radiation protection depends on the location of the unit and the function of the surrounding rooms. By order, the planning departments of Siemens Healthineers prepare radiation protection calculation and radiation protection plan.



On account of certain regional limitations of sales rights and service availability, we cannot guarantee that all products included in this brochure are available through the Siemens sales organization worldwide. Availability and packaging may vary by country and are subject to change without prior notice. Some/all of the features and products described herein may not be available in the United States.

The information in this document contains general technical descriptions of specifications and options as well as standard and optional features which do not always have to be present in individual cases.

The statements by Siemens' customers described herein are based on results that were achieved in the customer's unique setting. Since there is no "typical" hospital and many variables exist (e.g., hospital size, case mix, level of IT adoption), there can be no guarantee that other customers will achieve the same results. The customers cited are employed by an institution that might provide Siemens product reference services, R&D collaboration or other relationship for compensation pursuant to a written agreement.

Siemens reserves the right to modify the design, packaging, specifications, and options described herein without prior notice. Please contact your local Siemens sales representative for the most current information.

Note: Any technical data contained in this document may vary within defined tolerances. Original images always lose a certain amount of detail when reproduced.

Not all features shown in this brochure are necessarily standard and available in all countries.

**Published by**Siemens Healthineers AG
SHS ES FD

Siemens Healthineers Headquarters

Siemens Healthineers AG Siemensstr. 3 91301 Forchheim, Germany Phone: +49 9191 180 siemens-healthineers.com

