






SOMATOM Edge Plus

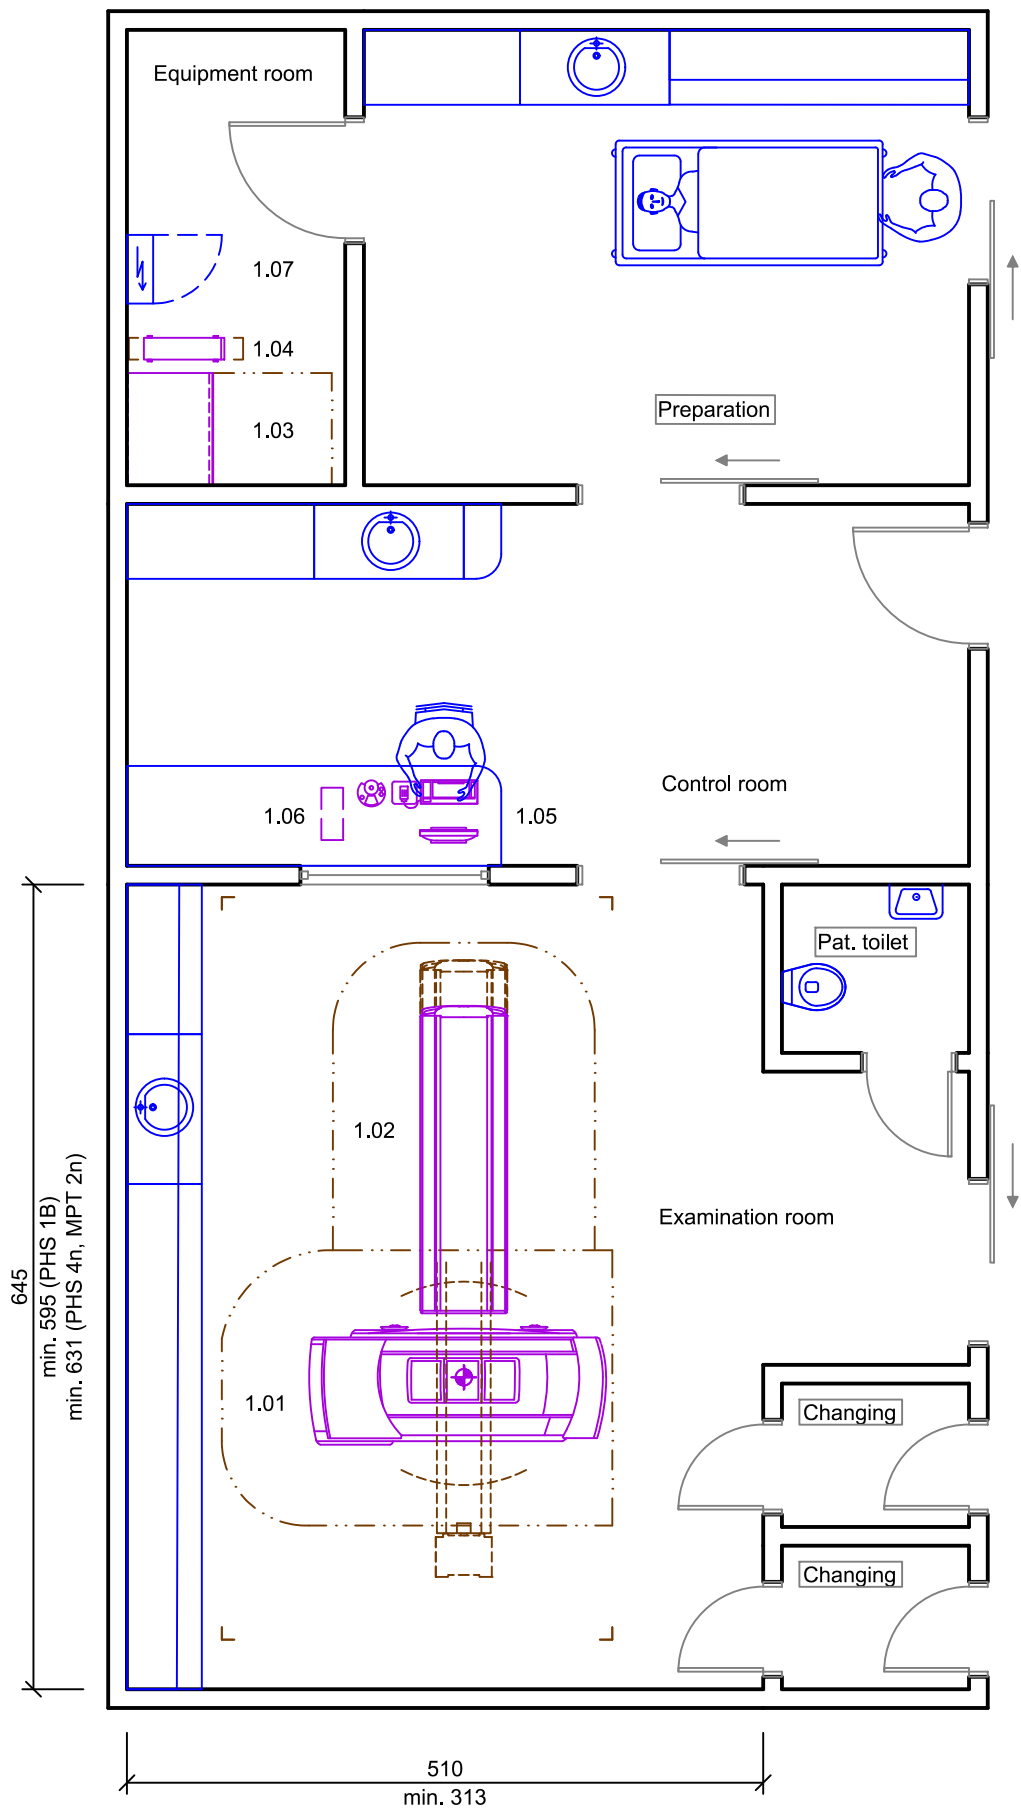
Basic Planning Information

Table of contents	
Planning Example	3
Room Dimensioning	5
Statics and Transport	6
Air-conditioning	8
Electrical Installation	9
General Information	11

Legend	
 Motion area / Swivelling range / Minimal room size / Safety distance	 Wall mounted
 Service area	 Additional equipment
 Floor mounted	 Demolition
 Ceiling mounted	

Dimensioning
<p>All installation measurements apply to finished wall/floor/ceiling and are to be checked prior to assembling the unit.</p> <div></div> <p> Orientation point = reference point of the Siemens Healthineers unit for planning and installation</p> <p>Please note: The drawing parts in this document are not to scale!</p>

Planning Example

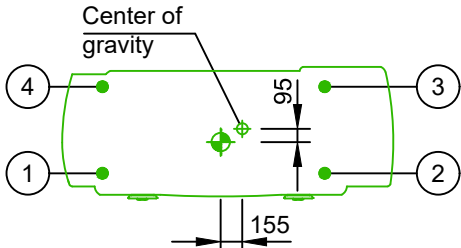


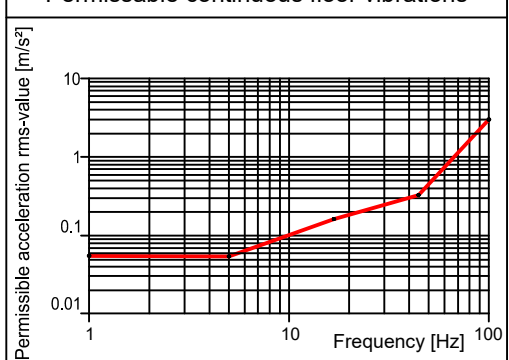
SOMATOM Edge Plus - Equipment Legend				
Pos.	Description	Weight (kg), Heat dissipation to the air (W)		
		kg	W	Remark
1.01	Gantry (water cooled)	2200	1000	#1, Isocenter 1020 mm
1.02	Patient table PHS 1B (1600 mm scannable range)	500	*	*included in 1.01
1.03	PDC (Power distribution cabinet) with integrated UPS	610	2000	
1.04	IRSmx5c Tower PC (Image Reconstruction System)	25	500	128 slices
1.05	Control unit with monitor, control box, keyboard	10	100	
1.06	ICS Tower 13 PC (syngo Acquisition Workplace)	25	500	
1.07	Power Distributor			by customer
	#1 Additional heat dissipation up to 12 kW to water			

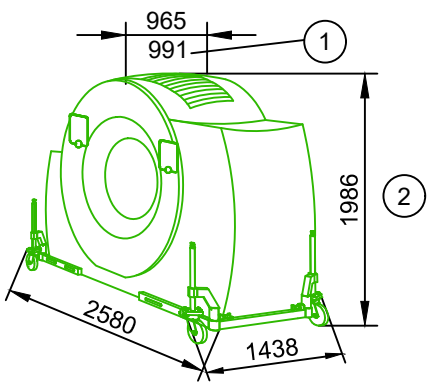
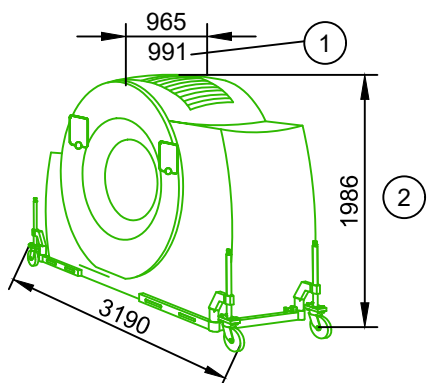
Room Dimensioning

Room dimensioning
The indicated room dimensions have to be checked on site. The planning department has to be informed about possible deviations. Otherwise we cannot assume any guarantee for the accurate implementation of the dimensions indicated in the planning documents.
Room height
Technically required minimum room height 2300 mm Measured from the highest point of the finished floor (with covering) to the lowest point of the ceiling

Statics and Transport

Statics					not to scale
		<p>The floor construction has to be performed solid and free of vibration, e.g. concrete flooring C20/25 to C50/60 corresponding to DIN EN 206-1, according to the maximum values as specified in the textblock "Floor and building vibrations".</p> <p>It is recommended to test the weight capacity of the concrete or composite flooring by a stress analyst.</p> <p>Fastening the gantry on the floor is possible but only necessary in countries prone to earthquakes or according to local regulations. Securing the patient table to the floor is mandatory.</p>			
Total weight of Gantry: 2200 kg		Total static load (center of gravity): $F_{\text{stat total}} = 21.6 \text{ kN}$			
Partial load on gantry foot number		①	②	③	④
Nominal static load after levelling $F_{\text{stat nom}}$ [kN]		4.6	6.85	5.55	4.6
Maximum dynamic load during gantry rotation $F_{\text{dyn max}}$ [kN]		± 0.6	± 0.5	± 0.5	± 0.6
Outer diameter gantry foot [mm]		80	80	80	80
Floor contact area gantry foot [cm ²]		52.1	52.1	52.1	52.1
<p>During gantry installation and leveling, the maximum possible load on one gantry foot can be 15 kN (the gantry is standing on two diagonal feet).</p> <p>Design access floors for a weight capacity of min. 400 kg per slab/plate. During gantry transport, the load may be higher at certain individual points (3-point load, e.g. due to uneven flooring).</p>					

Floor- and building vibrations	
<p>Floor- and building vibrations can reduce image quality!</p> <p>Sources that produce vibrations are, e.g.: Railroad routes, subways, roads, road works and construction sites, hospital power plants, mines, open-cast minings, quarries (explosions), ferry moorings, any other sources of striking vibrations. Any transient vibration has to be less than 0.5 m/s² peak-to-peak in the time domain.</p> <p>The CT system is not sensitive to common vibrations. If the CT is away from vibrational sources, or the CT is replacing a CT system that to date has not shown image quality problems due to vibrations, it is usually not necessary to execute vibrational measurements.</p> <p>It is the customer's responsibility to contract a qualified specialist. The specialist must implement site modifications to meet the specific limits, and to design structural solutions in case of deviations.</p> <p>If there are any doubts, the following thresholds have to be verified by measurement: In the three spatial directions, acceleration in vibrations at the mounting points of the computer tomograph (Gantry and Patient Handling System PHS) must not exceed the thresholds as described in the above shown diagram.</p>	
	<p>Permissible continuous floor vibrations</p> 

Transport Gantry		not to scale
<p>Standard transport Rollers swivelled out</p> 	<p>Transport through narrow passages Rollers swivelled in</p> 	
<p>① With touch panels on the rear (optional)</p>		
<p>② Transport device set to minimum floor clearance (7 mm)</p>		
<p>③ TIPPING HAZARD! Transport with the rollers swivelled in is permissible only when narrow passages make it impossible to transport the system with the rollers swivelled out. As soon as the system has passed through narrow passages, the transport rollers have to be swivelled out again. Attention: The overall dimensions between the front cover and back cover are larger than the maximum width of the transport device when the rollers are swiveled in.</p>		
<p>Gantry with transport device : 2389 kg, transport device : 189 kg If there is false floor in transportation route please check bearing capacity of this floor on-site! The maximum possible floor load (two-point load) per roller that may arise during gantry transport is 15 kN. If necessary, cover the transport route with metal sheets to distribute the load.</p>		
<p>The door must have a final clearance of 1250 mm if bed entrance to the CT examination room is requested.</p>		

Transport technical cabinets and patient table				
The PDC is mounted and delivered on a transport pallet.				
Transport dimensions	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
PDC with transport pallet - without UPS	1120	900	2070	≤600
IRSmx5c / IRSmx5b tower	645	175	450	25
PHS 1B with packing	2530	830	1430	750
MPT 2n with packing	2530	850	1430	850
PHS 4n with packing	2580	875	1570	700

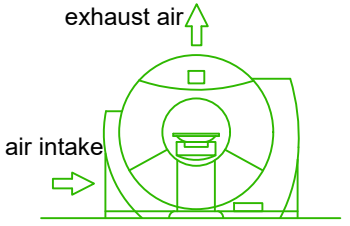
Air-conditioning

Climatic conditions for transport and storage		
Transport and storage of all components	Temperature Relative humidity Barometric pressure Temperature gradient Max. storage time	-20 to +50 °C 10 to 90 % 700 to 1060 hPa 10 K/h 2 months
The data for transporting and storing the CT system apply only if the system is shipped free of damage in the transport packaging provided by the manufacturer. All components have to be stored in the original transport packaging. If the original packaging is no longer available, you have to use an equivalent packaging for intermediate storage.		

Environment		
Entire CT System	Temperature Relative humidity Barometric pressure Temperature gradient	18 to 28 °C 20 to 75 % 800 to 1060 hPa 6 K/h
Maintain the temperature range required to meet the needs of changing seasons. If it is not possible, an on-site room heating and air conditioning system is required. When supplying air from the outside (fresh air), we recommend the on-site use of coarse Filters, Filter class EU3 to EU4 for filtering dust particles up to > 10 µm (DIN 24185/Part 2).		

On-site cooling water requirements for the water-cooled Gantry					
Utilisation of the CT system [%]	100 (Max. power)	75	50	25	0 (stand-by)
Heat dissipation to cooling water [kW]	12	9	7	5	2
Heat dissipation (Gantry and patient table) to air [kW]	1	1	1	1	1
Water temperature	4° to 16° C (without anti-freeze) 4° to 14° C (with anti-freeze)				
Temperature gradient (cooling water)	1 K / min				
Water pressure	Nominal: 2 - 6 bar Max.: 10 bar				
Water quality	Recommended potable water quality, max. particle size ≤ 0,25 mm (max. anti-freeze mixing ratio 40%)				
Depending on the water input temperature following requirements are valid:					
Minimum flow rate (without antifreeze)	470 to 2400 l/h	Pressure loss (without anti-freeze)		0.2 to 1 bar	
Minimum flow rate (with antifreeze)	730 to 2450 l/h	Pressure loss (with anti-freeze)		0.4 to 1 bar	
For service and filling procedure a water faucet with screw connection and a water drain (e.g. a sink or a siphon) in vicinity of the gantry is necessary.					

On-site cooling requirements for the air-cooled Gantry					
Workload CT-system [%]	100 (max power)	75	50	25	0 (stand-by)
Heat dissipation to ambient air [kW]	13	10	8	6	3
Air temperature (air intake)	18 to 28 °C				
Temperature gradient (air intake)	max. ± 1 K/min; max. <6 K/h; max. ± 4 K/h in 24h				
Humidity (air intake)	20 to 75 %				
Air flow rate (through the Gantry)	2300 m ³ /h				



The diagram shows a cross-section of the gantry. An arrow labeled 'air intake' points into the side of the gantry. Another arrow labeled 'exhaust air' points upwards from the top of the gantry.

The climatic room conditions for all air-cooled CT system components are influenced by design room conditions (e.g. windows, large glass areas, building and room insulation, room size and volume, etc.) and must be observed in the case of a new or existing air conditioning system in the examination room.

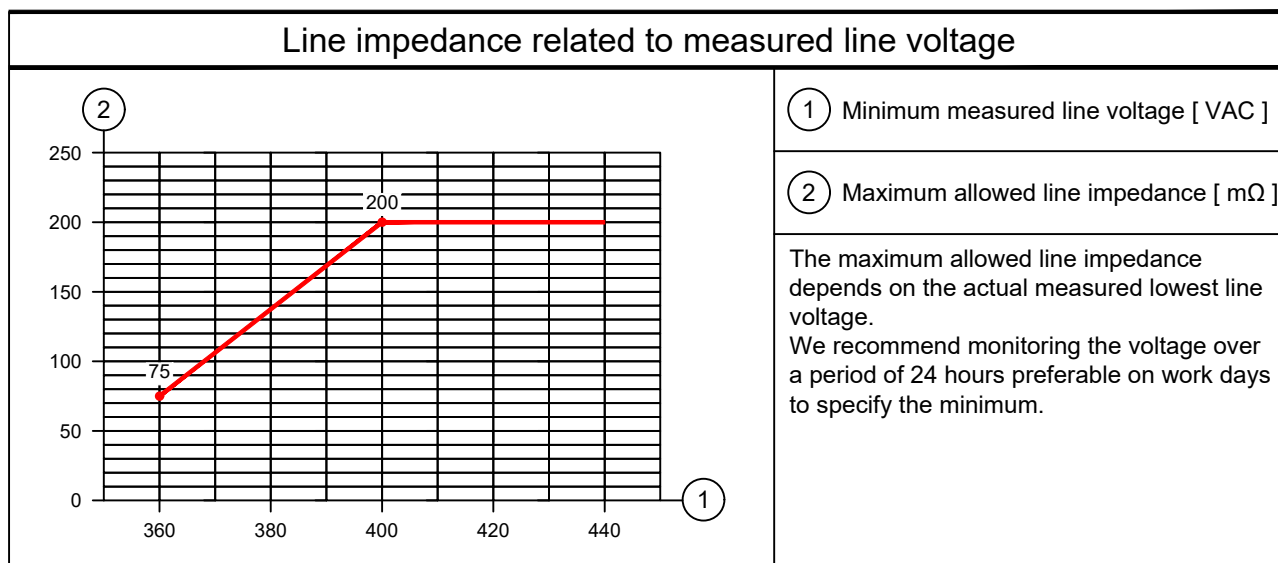
Electrical Installation

Power requirements			
Connection with 80 kW water cooling system or air cooling system			
Power line: TN-S System	3/N/PE AC 50/60 Hz ± 2 Hz	Connection value	86.5 kVA
Line voltage:	400 V ± 10 %	<u>Power consumption:</u> Stand-by: ≤ 4 kVA CompOn: ≤ 2.5 kVA System off: ≤ 1.7 kVA for time up to 6 s: max. 125 kVA	
Line impedance:	see diagram		
Cable cross section is to be determined by calculation			
Size of connector terminals in the PDC is 25 to 95 mm². N, PE adapter terminal 16 mm² available			

Power requirements			
Connection with 80 kW water/air-split cooling system			
Power line: TN-S System	3/N/PE AC 50/60 Hz ± 2 Hz	Connection value	86.5 kVA + 22 kVA
Line voltage:	400 V ± 10 %	<u>Power consumption:</u> Stand-by: ≤ 20 kVA CompOn: ≤ 2.5 kVA System off: ≤ 1.7 kVA for time up to 6 s: max.141 kVA	
Line impedance:	see diagram		
Cable cross section is to be determined by calculation			
Size of connector terminals in the PDC is 25 to 95 mm². N, PE adapter terminal 16 mm² available			

Power requirements			
Connection with 100 kW water cooling system or air cooling system			
Power line: TN-S System	3/N/PE AC 50/60 Hz ± 2 Hz	Connection value	86.5 kVA
Line voltage:	400 V ± 10 %	<u>Power consumption:</u> Stand-by: ≤ 4 kVA CompOn: ≤ 2.5 kVA System off: ≤ 1.7 kVA for time up to 3 s: max. 140 kVA	
Line impedance:	see diagram		
Cable cross section is to be determined by calculation			
Size of connector terminals in the PDC is 25 to 95 mm². N, PE adapter terminal 16 mm² available			

Power requirements			
Connection with 100 kW water/air-split cooling system			
Power line: TN-S System	3/N/PE AC 50/60 Hz ± 2 Hz	Connection value	86.5 kVA + 22 kVA
Line voltage:	400 V ± 10 %	<u>Power consumption:</u> Stand-by: ≤ 20 kVA CompOn: ≤ 2.5 kVA System off: ≤ 1.7 kVA for time up to 6 s: max.156 kVA	
Line impedance:	see diagram		
Cable cross section is to be determined by calculation			
Size of connector terminals in the PDC is 25 to 95 mm². N, PE adapter terminal 16 mm² available			



Room lighting
<p>Ambient lighting in rooms with diagnostics or with workstations must comply with the respective local and national regulations.</p> <p>General requirements like the needed intensity of illumination - adjustable, reproducible, flicker-free or a limitation of dazzlings and reflections etc. have to be observed (EN 12464-1, DIN 5035-7).</p>

General Information

Display screen workstations

For setting up display screen workstations, take account of the guidelines in the Display Screen Workstation directive as well as any national regulations (e.g. EN ISO 9241-5).

Smart Remote Services (SRS)

Smart Remote Services (SRS) is used for remote diagnostics as well as remote service to provide highest system availability.

Requirements:

- Broadband connection (minimum 4 MBit/s down- and 768 kBit/s upstream, optimum 30 MBit/s down- and 2 MBit/s upstream) without time or volume limitations
- Router (for exclusive use with SRS)

Data protection and security is defined in the Smart Remote Services security concept.

Network Integration

The Siemens Healthineers components are using TCP/IP Protocol, a 100/1000 Mbit/s switched Ethernet network and static IP addresses.

The required network cabling (min. CAT 5 TP) has to be provided on site. Media converters, which are needed for using fibre optic cabling, are not in scope of delivery.

To prepare the implementation of the new system into the existing network environment, the availability of the needed network data at least two weeks before starting the installation is mandatory.

This is the only way to ensure a seamless integration of the new system into the workflow of the department.

Notes on preparations for installation

Contracts for performing and supervising on-site installation preparations should be concluded with technically competent companies by the customer. The customer is responsible for timely and proper completion and supervision of all preparations for installation at the construction site in observance of all applicable legal regulations (e.g. X-ray regulations, radiation protection regulations) and all applicable general recognized rules of technology (e.g. VDE regulations, DIN standards).

Execution and supervision of installation preparations at the construction site and later observance of the standard operating conditions are not included in our duties. The customer is responsible for checking the static calculations and, where applicable, the air conditioning in the building to be equipped.

Safety distances

Distances from moving parts of the medical device to walls, furniture and other equipment have to be kept to avoid injuries by crushing in compliance with local regulations, e.g. a minimum distance of 50 cm according to DIN EN ISO 13854.

It is the customer's responsibility to ensure the above requirements are followed.

This is to avoid the risk of injury.

If safety distances are not maintained **appropriate on-site safety measures** have to be put in place. Clear visible markings according to national guidelines, e.g. crushing warning signs, hazard warning tape, hazard area cordon, safety mats, may be required.



Radiation protection

The structural radiation protection depends on the location of the unit and the function of the surrounding rooms. By order, the planning departments of Siemens Healthineers prepare radiation protection calculation and radiation protection plan.

On account of certain regional limitations of sales rights and service availability, we cannot guarantee that all products included in this brochure are available through the Siemens sales organization worldwide. Availability and packaging may vary by country and are subject to change without prior notice. Some/all of the features and products described herein may not be available in the United States.

The information in this document contains general technical descriptions of specifications and options as well as standard and optional features which do not always have to be present in individual cases.

The statements by Siemens' customers described herein are based on results that were achieved in the customer's unique setting. Since there is no "typical" hospital and many variables exist (e.g. hospital size, case mix, level of IT adoption), there can be no guarantee that other customers will achieve the same results. The customers cited are employed by an institution that might provide Siemens product reference services, R&D collaboration or other relationship for compensation pursuant to a written agreement.

Siemens reserves the right to modify the design, packaging, specifications, and options described herein without prior notice. Please contact your local Siemens sales representative for the most current information.

Note: Any technical data contained in this document may vary within defined tolerances. Original images always lose a certain amount of detail when reproduced.

Not all features shown in this brochure are necessarily standard and available in all countries.

Published by
Siemens Healthineers AG
SHS ES FD

Siemens Healthineers Headquarters
Siemens Healthineers AG
Siemensstr. 3
91301 Forchheim, Germany
Phone: +49 9191 180
siemens-healthineers.com